


# NOVA Limited

## DA Series Slip Ring Brush Holders

Designed for use with both fast moving slip rings i.e. Alternators and slip ring motors, and slow moving high current density applications such as cable reeling drums and leisure rides. These units are therefore very adaptable and lend themselves to many varied applications. Current ratings are available upon request.

Dimension 'C' = Approximate distance between centre of clamping hole and centre line of brush when brush holder is in working position.

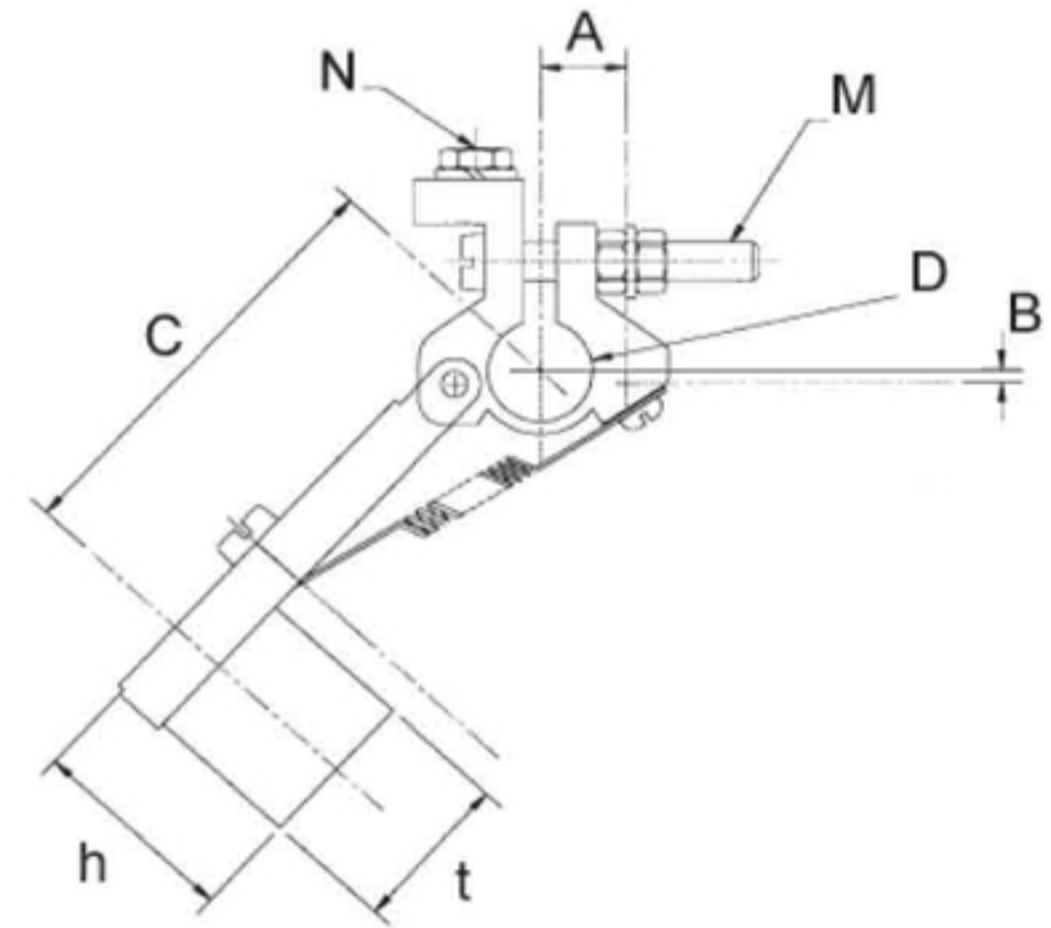

Type	Brush.Dimensions			Bore				E.			
	a.	t.	h.	A.	B.	C.	D.	Max.	Max.	M.	N.
DA100/250/70	10	25	32	12.5	5	70.5	12.7	13	16	M6	M6x8
DA127/222/64	12.7	22.2	30	15	5	64	16	19	17.5	M6	M6x8
DA127/254/83	12.7	25.4	28	15	5	83	16	19	17.5	M6	M6x8
DA160/320/76	16	32	32	15	5	76	16	19	21	M6	M8x10

**CONSTRUCTION** Brass with copper foil connections, spring :- plated spring steel.

All steel parts plated. Note: DA160/320/76 - braid connections. Variations and brushes can be supplied upon request.

20 Dixon Place, College Milton, East Kilbride, G74 5JF

Tel.: +44(0)13552 34443 Fax: +44(0)13552 47301

Email: [info@nova.uk.com](mailto:info@nova.uk.com)